

SHOT-OFF COOK

Version female x female with gland




DRUCK & TEMPERATUR

It is recommend to install a barrier between the pressure gauge and pressure line.

Shut-off cocks allow for inspection or replacement of a pressure measuring device without service interruption.

Depending on the position of the plug, the connected device vented (ventilation position) or be pressured (working position).

In the discharge position the measured medium can escape into the open air.

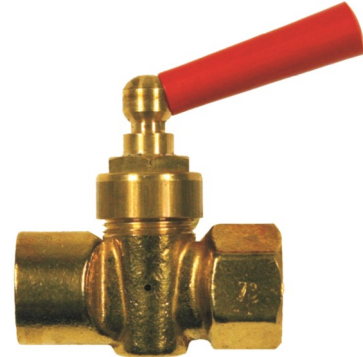

Type	52	Options
Version	Female x female with gland	
Material	Brass	other on request
Material handle	Heat resistant plastic, red	
Nominal pressure of the pressure gauge	PN 10 for higher pressures: use shut-off valves)	
Medium temperature	-10°C (prevent ice formation!) up to +120°C	
Connection	Inlet G1/2 female, outlet G1/2 with gland	G1/4, without gland
Test connection	without	

Dimensional drawing Dimensions in mm

