

SHOT-OFF COCK

Version female x female, turnable




It is recommended to install a barrier between the pressure gauge and pressure line.

Shut-off cocks allow the inspection or replacement of a pressure measuring device without service interruption.

Depending on the position of the plug, the connected device can be vented (ventilation position) or pressured (working position).

In the discharge position the measured medium can escape into the atmosphere.

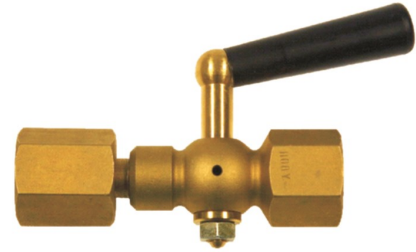

Type	54	Options
Version	Female G1/2 x female G1/2, turnable	M 20 x 1,5
Material	Brass	
Material handle	Heat-resistant plastic	
Nominal pressure of the pressure gauge	PN 25 (for higher pressures: use shut-off valves)	
Medium temperature	max. 50°C	
Connection	Inlet G1/2 female, outlet G1/2 female, rotatable	Inlet G1/2 male
Test connection	Without	

Dimensional drawing Dimensions in mm

