

# AUTOMATIC VALVE

## PN 12



DRUCK & TEMPERATUR

The automatic valve is installed between the medium line and the pressure gauge.

Without attaching or mounting a pressure measuring device, the automatic valve blocks the outlet of the medium line.


If a pressure measuring device is installed, the centering pin on the connection thread of the pressure measuring device pushes a plunger down. This opens the passage.

When dismantling, the outlet is automatically closed again.



|                    |   |
|--------------------|---|
| Type               | 73 151  |
| Material           | Brass (option: stainless steel)               |
| Compression spring | Stainless steel                               |
| O-Ring sealing     | NBR 70  |
| Connection         | G1/4 female (measuring device), G1/2 (medium) |
| Nominal pressure   | PN 12   |
| Temperatures       | max. 100°C                                    |

### Structure / working principle / dimensions

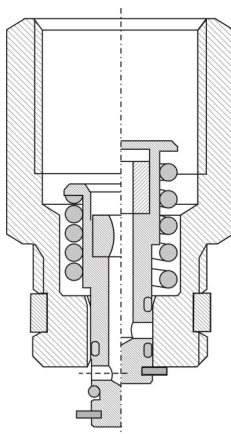

Left side: passage open

Right side: passage closed

